



Basic component

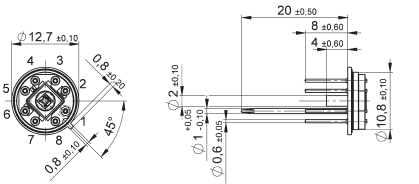


Absolute model
T08


Component delivery form

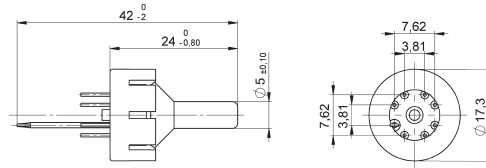

Weight approx. 4.5 g
Protection cap is suitable for applying pressure up to 10 bar

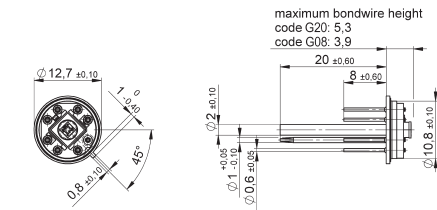


Relative model

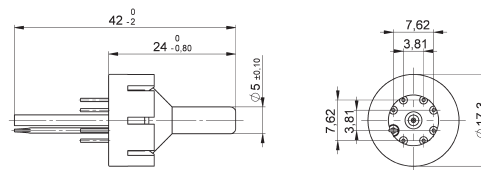

Weight approx. 4.5 g
Protection cap is suitable for applying pressure up to 10 bar

Order No.



Overview

Pressure sensor modules K-series STARe has specification similar to sense dies of our High Stability Line STARe. The dies are mounted on T08-headers and used for absolute or relative (gauge) pressure measurement. (V-, L- and M-Layout)

Note: The sensor consist of silicon, glass, glue and gold. Therefore substances which might react with these materials should be tested before application

Applications

- Industrial transmitter
- Measurement and control

Features

- Very high long term stability
- Very low pressure and temperature hysteresis
- High static pressure applicable
- Fast response
- High bridge resistance
- Fatigue free monocrystalline silicon diaphragm giving high load cycle stability
- Temperature sensor (Spreading resistance)
- Filling volume consists of ceramic components (no swelling in oil)

- 1 Product Code
K-Series STARe A/G
- 2 Outside Dimension
V: 4,75 X 4,75 mm (6kPa...10kPa)
L: 2,75 X 2,75 mm (35kPa...100kPa)
M: 2,15 X 2,15 mm (250kPa...1MPa)
- 3 Pressure Range [Pa]
06k0: 6 kPa = 60 mbar
40M0: 40 MPa = 400 bar
- 4 Type
X:A = Absolute (Glass)
G = Gauge (Glass)
- 5 Thickness Dies Back Plate
YY = Back Plate
Thickness in 100 µm

Certificate

ISO/TS 16949

Common Characteristics

| Type | Pressure range | Parameter | min. | typ. | max. | Unit |
|-----------------------|----------------|--------------|------|------|------|-------|
| K10-HS20VB-06k0-A/GXX | 6 kPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20VB-10k0-A/GXX | 10 kPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20LB-35k0-A/GXX | 35 kPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20LB-100k-A/GXX | 100 kPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20MB-250k-A/GXX | 250 kPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20MB-500k-A/GXX | 500 kPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20MB-01M0-A/GXX | 1,0 MPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20MB-03M0-A/GXX | 3,0 MPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20MB-10M0-A/GXX | 10,0MPa | Span voltage | 200 | 250 | 300 | mV@5V |
| K10-HS20M-20M0-A08 | 20,0MPa | Span voltage | 60 | 100 | 140 | mV@5V |
| K10-HS20M-40M0-A08 | 40,0MPa | Span voltage | 60 | 100 | 140 | mV@5V |


Contact

First Sensor AG
www.first-sensor.com

Electrical Characteristics (measured at 5V supply and 25 °C, unless otherwise specified)

| Parameter | min. | typ. | max. | Unit |
|--|-------|----------------|-------|-----------|
| Bridge resistance | 5.000 | 6.000 | 7.000 | Ω |
| Offset voltage | -25 | 0 | +25 | mV |
| Temperature coefficient of bridge resistance ¹ | +0,07 | +0,09 | +0,11 | %/K |
| Temperature coefficient of offset ¹ (>100kPa) | -0,05 | ±0,01 | +0,05 | %F.S.S./K |
| (<250kPa) | 0,00 | +0,05 | +0,10 | |
| Temperature coefficient of span ¹ (>10kPa) | -0,23 | -0,20 | -0,17 | %F.S.S./K |
| Temperature hysteresis ¹ | | <0,05 | | ±%F.S.S. |
| Pressure hysteresis | | <0,10 | | ±%F.S.S. |
| Linearity error ^{2,3} (higher than 10 kPa) p-range: higher than 10MPa | | <0,30 <1,00 | 0,50 | ±%F.S.S. |

1) Measured from 25°C to 85°C. 2) End point straight line setting.
3) Pressure applied onto the front side of the die



Order No.

| | | | | |
|----------------------------|---|---|---|---|
| K10 - HS20XB - XXXX - X YY | | | | |
| 1 | 2 | 3 | 4 | 5 |

- 1 Product Code
K-Series STARe A/G
- 2 Outside Dimension
V: 4,75 X 4,75 mm
(6kPa...10kPa)
L: 2,75 X 2,75 mm
(35kPa...100kPa)
M: 2,15 X 2,15 mm
(250kPa...1MPa)
- 3 Pressure Range [Pa]
06k0: 6 kPa = 60 mbar
40M0: 40 MPa = 400 bar
- 4 Type
X:A = Absolute (Glass)
G = Gauge (Glass)
- 5 Thickness Dies Back Plate
YY = Back Plate
Thickness in 100 μm

Certificate

ISO/TS 16949

Maximum Rating

| Type | Over Pressure (100kPa) | | Burst Pressure (100kPa) | |
|-----------------------|------------------------|---------|-------------------------|---------|
| | FS min. | RS min. | FS min. | RS min. |
| K10-HS20VB-06k0-A/GXX | 4 | 2* | >4 | >2* |
| K10-HS20VB-10k0-A/GXX | 6 | 3* | >6 | >3* |
| K10-HS20LB-35k0-A/GXX | 10 | 5 | >10 | >5 |
| K10-HS20LB-100k-A/GXX | 20 | 10 | >20 | >10 |
| K10-HS20MB-250k-A/GXX | 40 | 20 | >40 | >20 |
| K10-HS20MB-500k-A/GXX | 50 | 25 | >50 | >25 |
| K10-HS20MB-01M0-A/GXX | 60 | 30 | >60 | >30 |
| K10-HS20MB-03M0-A/GXX | 150 | 75 | >150 | >75 |
| K10-HS20MB-10M0-A/GXX | 200 | 75 | >200 | >75 |
| K10-HS20M-20M0-A08 | 600 | - | >600 | - |
| K10-HS20M-40M0-A08 | 800 | - | >800 | - |

FS: Frontside; RS: Rearside; * 1 bar for G-Type


| Parameter | Limit Values | | | Unit |
|-----------------------------|--------------|------|------|------|
| | min. | typ. | max. | |
| Operating temperature range | -40 | | +125 | °C |
| Storage temperature range | -50 | | +130 | °C |
| Supply voltage | | 5 | 12 | V |

Contact

First Sensor AG
www.first-sensor.com

Silicon Temperature Sensor (at $T_A = 25^\circ\text{C}$ and $I_b = 1\text{ mA}$, unless otherwise specified)

| Parameter | Symbol | Limit Values | | | Unit | |
|---|----------|--------------|------|-------|------------|--|
| | | min. | typ. | max. | | |
| Sensor resistance at $T_A=25^\circ\text{C}$ | R_{th} | 1,85 | 2,00 | 2,15 | k Ω | |
| Spread of temperature factor | | | | | | |
| $T_A=-25^\circ\text{C}$ | k_T | 0,655 | 0,66 | 0,675 | | |
| $T_A=0^\circ\text{C}$ | | 0,812 | 0,82 | 0,826 | | |
| $T_A=25^\circ\text{C}$ | | 1 | | | | |
| $T_A=50^\circ\text{C}$ | | 1,195 | 1,20 | 1,215 | | |
| $T_A=75^\circ\text{C}$ | | 1,42 | 1,43 | 1,45 | | |
| $T_A=100^\circ\text{C}$ | 1,66 | 1,68 | 1,70 | | | |
| $T_A=125^\circ\text{C}$ | 1,92 | 1,95 | 1,98 | | | |



Order No.

K10 - HS20XB - XXXX - X YY

- Product Code
K-Series STARe A/G
- Outside Dimension
V: 4,75 X 4,75 mm (6kPa...10kPa)
L: 2,75 X 2,75 mm (35kPa...100kPa)
M: 2,15 X 2,15 mm (250kPa...1MPa)
- Pressure Range [Pa]
06k0: 6 kPa = 60 mbar
40M0: 40 MPa = 400 bar
- Type
X:A = Absolute (Glass)
G = Gauge (Glass)
- Thickness Dies Back Plate
YY = Back Plate
Thickness in 100 μm

Certificate

ISO/TS 16949

Contact

First Sensor AG
www.first-sensor.com

Version Rev 04
Page 3/3


$$R_{th} = R_{25} \cdot (1 + \alpha \cdot \Delta T_A + \beta \cdot \Delta^2 T_A) [\Omega] = f(T_A)$$

$$\alpha = 7.68 \cdot 10^{-3} [K^{-1}], \beta = 1.88 \cdot 10^{-5} [K^{-2}]$$

$$k_T = \frac{R_{th}}{R_{25}} = 1 + \alpha \cdot \Delta T_A + \beta \cdot \Delta^2 T_A = f(T_A)$$

$$T = 25 + \frac{\sqrt{\alpha^2 - 4\beta} + 4\beta \cdot k_T - \alpha}{2\beta} [^\circ\text{C}]$$

Pin configuration

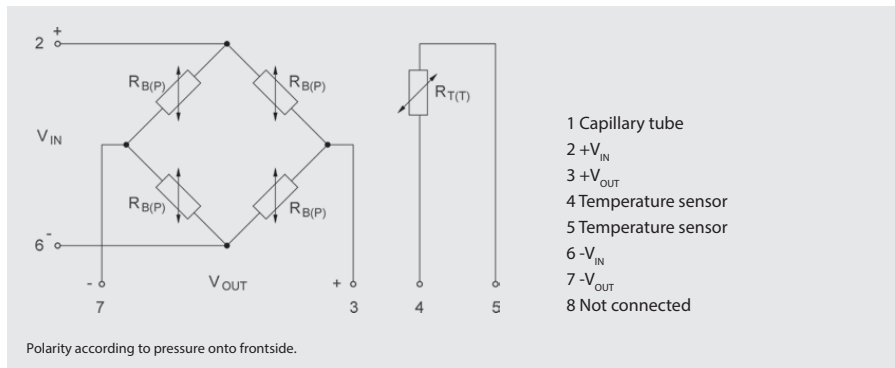

Disclaimer

All informations are only for product description without any legal binding. For further improvement of technical details, they are subject to change.