

FEATURES

- 2-way and 3-way configurations
- Wetted parts composed of non-corrosive plastics, stainless steel and a variety of elastomer seals
- High cycle life
- Small packages with no sliding metal-to-metal surfaces
- Eliminates potential leak paths with integral barbs molded as part of the valve body and machined to the endplate
- Requires no pressure to operate
- RoHS compliant



MEDIA COMPATIBILITY

Liquids and gases

WETTED MATERIALS

Materials contacting media:

PTFE, stainless steel, seals, body

Diaphragm version: EPDM, Ryton (PPS)

Seals:

FKM, EPDM

Body:

PEEK

Diaphragm version: Ryton (PPS)

PHYSICAL PROPERTIES

Operating environment	4 to 66 °C
Weight	51 to 57 g (material and configuration dependent)
Porting	1/16", 1/8" or 3/16" barb
Internal volume	
1/16" barb	238 µl
1/8" barb	326 µl
3/16" barb	516 µl
Filtration (recommended)	10 µm

ELECTRICAL

Power	2.5, 4.2 W
Voltage	12, 24 V _{DC}

Series 3

General purpose 2-way and 3-way solenoid valves


PERFORMANCE CHARACTERISTICS

Part no.	Pressure	Orifice sizes	Leak rate	Response
See Ordering Information	Vacuum...7 bar (100 psi)	0.055" (1.40 mm)	Bubble tight	20 ms
	Vacuum...3.5 bar (50 psi)	0.078" (1.98 mm)		
	Vacuum...1.7 bar (25 psi)*			
	Vacuum...1.4 bar (20 psi)	0.090" (2.29 mm)		


* Diaphragm version

FLOW CURVES


Air flow

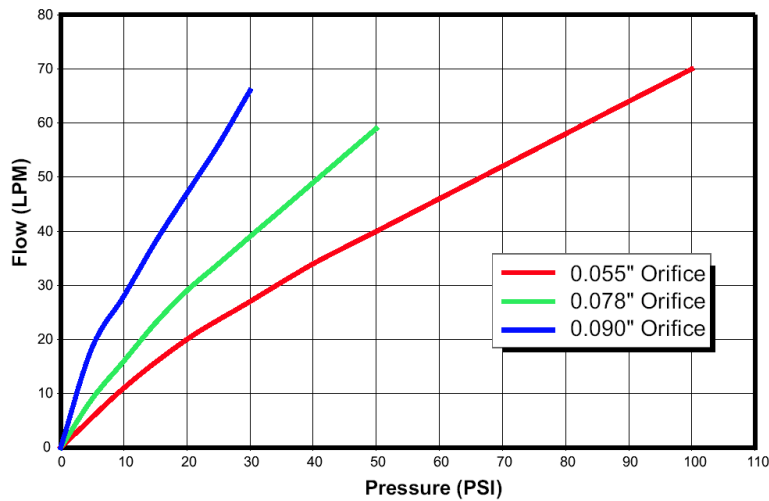

Water flow

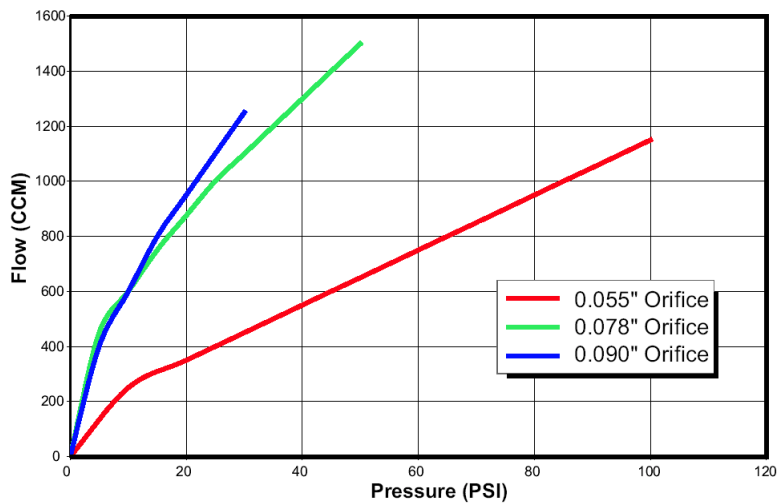

OUTLINE DRAWING

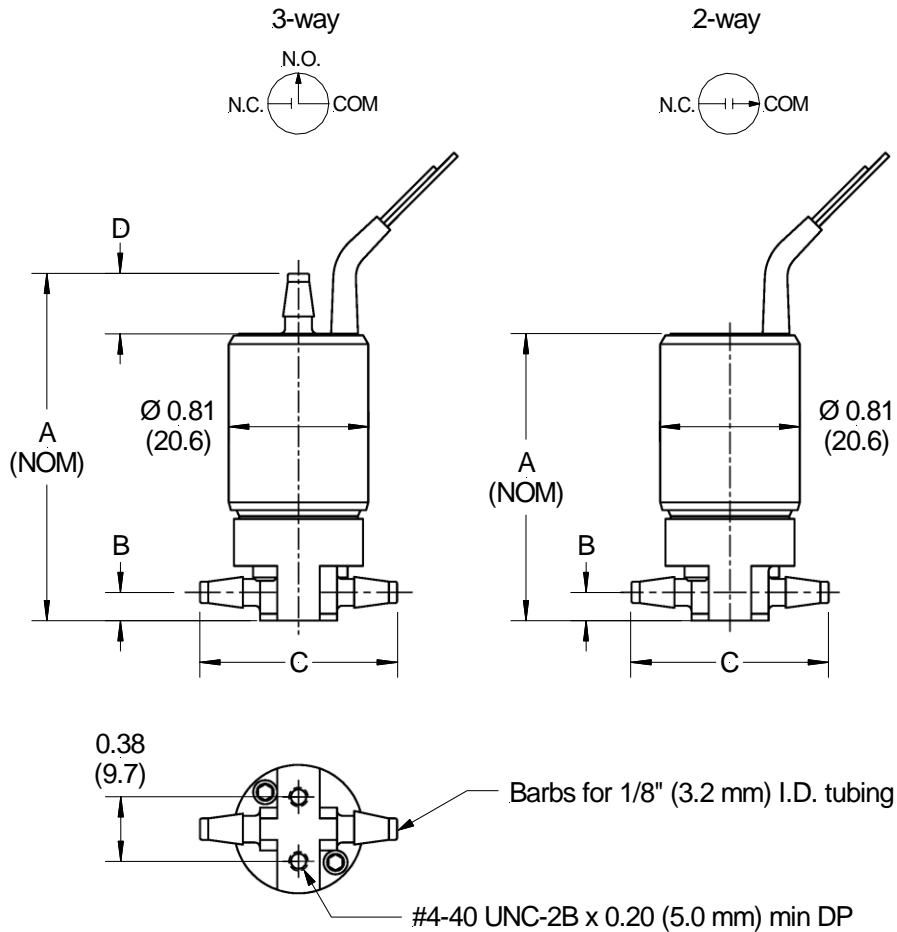

Dimensions

Ports	3-way				2-way		
	A	B	C	D	A	B	C
1/16" barbs	1.86 (47.2)	0.16 (4.1)	0.98 (24.9)	0.17 (4.3)	1.69 (42.9)	0.16 (4.1)	0.98 (24.9)
1/8" barbs	2.03 (51.6)	0.16 (4.1)	1.02 (25.9)	0.35 (8.9)	1.69 (42.9)	0.16 (4.1)	1.02 (25.9)
3/16" barbs	2.13 (54.1)	0.16 (4.1)	1.32 (33.5)	0.44 (11.2)	1.69 (42.9)	0.16 (4.1)	1.32 (33.5)

dimensions in inches (mm)

Series 3

General purpose 2-way and 3-way solenoid valves

ORDERING INFORMATION

Part No.	Type	Operating Pressure	Orifice	Voltage	Porting	Seals	
003-0137-900	2-way NC	Vac...7 bar (100 psi)	1.40 mm (0.055")	12 V _{DC}	1/16" barb	FKM	
003-0218-900						EPDM	
003-0130-900	3-way					FKM	
003-0214-900						EPDM	
003-0096-900	2-way NC			24 V _{DC}		1/8" barb	FKM
003-0264-900							EPDM
003-0194-900	3-way						FKM
003-0241-900							EPDM
003-0141-900	2-way NC	Vac...3.5 bar (50 psi)	1.98 mm (0.078")	12 V _{DC}	FKM		
003-0260-900					EPDM		
003-0120-900	3-way				FKM		
003-0356-900					EPDM		
003-0111-900	2-way NC			24 V _{DC}	3/16" barb	FKM	
003-0257-900						EPDM	
003-0165-900	3-way					FKM	
003-0258-900						EPDM	
003-0178-900	2-way NC	Vac...1.7 bar (25 psi)	12 V _{DC}	EPDM			
003-0496-900			24 V _{DC}	diaphragm			
003-0175-900		3-way	Vac...1.4 bar (20 psi)	12 V _{DC}		FKM	
003-0189-900						EPDM	
003-0328-900	3-way	FKM					
003-0347-900		EPDM					
003-0359-900	2-way NC	24 V _{DC}		3/16" barb	FKM		
003-0376-900					EPDM		
003-0421-900	3-way				FKM		
003-0461-900					EPDM		

First Sensor reserves the right to make changes to any products herein. First Sensor does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.